




These items are standard with Donut Robot® Mark VI systems. They are also available individually.

Collecting and cooling donuts *For transfer direct to icer or glazer*



RL-18 Rack Loader


Glazing Screen




Mark VI and Mark VI-TM VI systems feature the **RL-18 Rack Loader** pictured. It smoothly gathers donuts (or other product) fresh from the fryer onto **Glazing Screens** so that they can be transferred direct to the glazer in batches of 24. The screens can also be placed direct on Belshaw's HI18 high-production icer, saving time and eliminating almost all product handling.

Inserting yeast-raised donuts into the fryer

The **FT-6 Feed Table** accepts raised donuts from a proof box such as Belshaw's EP18/24. The donuts are laid on a **Proofing Cloth** and **Proofing Tray** to rise, then transferred onto the FT-6. The Feed Table advances in time with the fryer and drops the donuts into the fryer. The process allows the donut maker to move about rather than standing in front of the fryer.



Proofing Tray

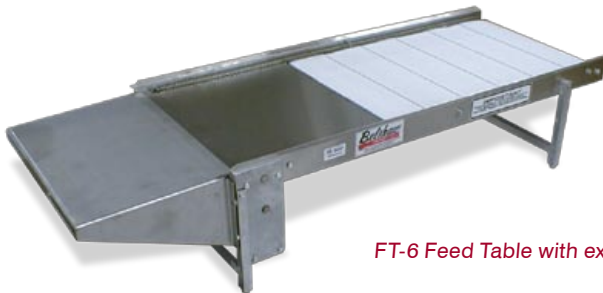

FT-6 Feed Table with extension



Proofing Cloths

Mounting and storage tables for Mark VI



FT-6 Table

The **FT-6 Mounting Table** (left) secures the FT-6 Feed Table while allowing it to slide back while cake donut production is in progress. It is movable on heavy duty height-adjustable casters. The **Mark VI Table** supports and locks down the fryer, has holes for the fryer drain and EZ Melt refill tube, and is height adjustable. It houses the EZ Melt VI shortening filter below the fryer. Both tables make efficient use of space with storage available for shortening blocks, glazing screens, proofing cloths and proofing trays.



Mark VI Table

Accessories for Donut Robot® Mark VI

Dimensions And Power						
MODEL	OVERALL DIMENSIONS		APPROX SHIPPING WEIGHT		ELECTRICAL DATA	
	Width x Depth x Height		Shipping Class=85		V	W
	in.	cm.	lbs.	kg.		
FT-6 FEED TABLE	44 x 18 x 11	112 x 46 x 28	62	28	110V, 50/60Hz, 1ph (connected to fryer)	600
RACK LOADER (RL18)	21 x 29 x 10	53 x 74 x 25	25	11.5		
MARK VI MOUNTING TABLE	77 x 32 x 31	196 x 81 x 79	275	125		
FT-6 MOUNTING TABLE	54 x 32 x 31	137 x 81 x 79	162	74		

Other Specifications	
MODEL	CONSTRUCTION
FT-6 FEED TABLE	Chains and hooks are stainless steel. Other parts are stainless steel, nickel plated steel, and cast aluminum alloy. Extension (11"/28cm) is stainless steel.
RACK LOADER (RL-18)	Loader is stainless steel. Glazing screens (available separately) are nickel plated steel.
MARK VI MOUNTING TABLE	Frame is painted steel. Shelves are stainless steel. Casters are stainless steel.
FT-6 MOUNTING TABLE	Frame is painted steel. Shelves and adjustable feet are stainless steel.
PROOFING CLOTHS with rods	Proofing cloths are polypropylene. Rods (1 per cloth) are mild steel.
PROOFING TRAYS	Proofing trays are aluminum with 1/2" (13mm) perforations.