

## BX-10 **eco-touch** Bakery Convection Oven

### Features

- Holds ten 18" x 26" baking pans
- 3½" height between pan shelves
- Steam injection standard on all ovens
- Touchscreen graphical controller (see features below)
- High quality build with rigid foil-faced insulation around oven
- Bi-directional fan (for more even baking)
- Same energy efficient construction as BX4
- Welded seams throughout, to prevent steam leakage into insulation layer around oven
- Cool-to-Touch double insulated door with twin pane viewing window
- ETL certified to UL-197 and NSF-4
- 1 year parts/labor warranty

### Color Touch Screen

- Touch screen controller with intuitive interface for fast, easy, and mistake-free usage. Icons and illustrations used for menu selection.
- **Up to 240 bake programs.** Settings can be changed while the program is running. Each program has the option to control:
  - Bake time
  - Bake temperature
  - Steam duration
  - Damper open/shut (allows steam/heat to exit chamber)
  - Fan direction
- **'Favorites' menu** accesses the most frequently used programs
- **'Multi-Bake' function.** Allows the operator to track progress of 4 different product items simultaneously. Progress bars provide a clear indication of each bake cycle. The voice prompt or buzzer sounds when each program has finished or needs other attention.
- **7-day timer** to start oven at selected times, ready for every shift. 4 events can be programmed for each day of the week.
- **'Help' function** at top of every screen
- **'Sleep mode'** returns oven to a selected standby temperature - reducing energy consumption up to 66%
- **Auto-shutdown** to prevent oven from being left on by mistake
- **Diagnostics function** to monitor performance and report status, while oven is running
- **Voice prompts** such as "Door Open", "Bake Over", etc available as desired. (Standard alert tones and buzzers are also available)
- **All functions are easily uploadable and downloadable via USB.** This includes recipes, sounds and tones, logos, icons, images and software.

### Options

- 4-shelf stand



Above: BX10 **Eco-touch** convection oven with optional 4-shelf stand. Shown with baguette racks (purchased separately).

Serving bakeries for **95** years

## Specifications

Each oven requires 2 electrical connections and 1 water connection

Pan size	18" x 26"
Shelf spacing	3.5" per shelf
Clearance requirement	2" at rear
<b>Shipping data</b> (Estimated)	
Shipping weight	982 lbs
Shipping Class	85
<b>Electrical connection 1</b> (There are 2 connections for each oven)	
Volts	208 Volts, 60 Hertz, 3 phase
Full Load Amps	45 A
Connection	Hard wired, 1¼" seal flex (3C+G)
Conduit length	72 inches
<b>Electrical connection 2</b> (There are 2 connections for each oven)	
Power	120 Volts, 60 Hertz, 1 phase
Full Load Amps	5.2 A
Plug	NEMA 5-15P
Cord	72 inches
<b>Water connection</b>	
Pressure	20 psi
Connection	'Garden hose thread' connection
Damper	Butterfly type




BX Eco-touch Controller (sample screens) ↑

## Certifications



ETL certified to UL-197 and NSF-4

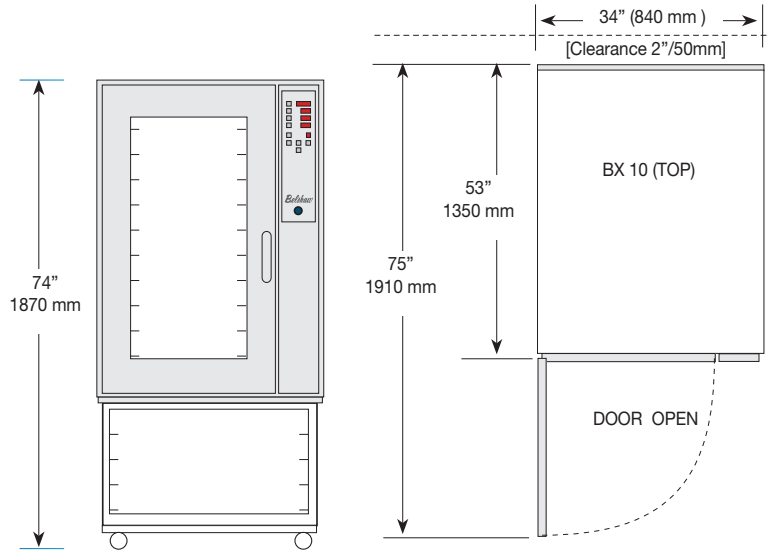

Serving bakeries for **95** years