

CABINET PROOFER Designed for donut production

SUPERIOR CAPABILITY, LOWER PRICE

- **Heavy duty insulated top and bottom doors.** Doors retain maximum heat and humidity for a faster, more consistent proof.
- **Improved heat and humidity system.** Full time temperature display, improved moisture management and collection features, easier water fill.
- **Designed for donuts.** 17 shelves @ 3" spacing to maximizes capacity while maintaining proof quality. Adjustable shelf spacing makes the proofer also suitable for all other baked goods.
- **Accepts both 17" x 25" and 23" x 23" donut screens.** This versatility makes the proofer compatible with Open Kettle and Donut Robot® fryers.
- **Capacity with 17" x 25" screens:** 51 dozen donuts/ hour @ nominal proof time 40 minutes.
- **Capacity with 23" x 23" screens:** 76 dozen donuts/ hour @ nominal proof time 40 minutes.
- **Easy to clean, easy to service.** Electrical components are removable in a drawer at the bottom of the proofer.

MODELS & PART NUMBERS

	MODEL / PART #
Cabinet Proofer, 120V	CP-1
Cabinet Proofer, 220V	CP-2
Cabinet Proofer, 240V	CP-2
Auto-water, 120V	CP-1001
Auto-water, 200-240V	CP-1002

COMPATIBILITY

All models	Compatible with 618L, 624, 718L, 724 and Mark VI fryers. Also compatible with 616B and Mark II/Mark V, with SL200-0004 screens for shelf support.
-------------------	--





↙ Top/Bottom doors
Removable electrical
drawer ↓




BELSHAW PROOFER (WITH 3" SHELF SPACING)

30½" Width x 30½" Depth x 69¾" Height

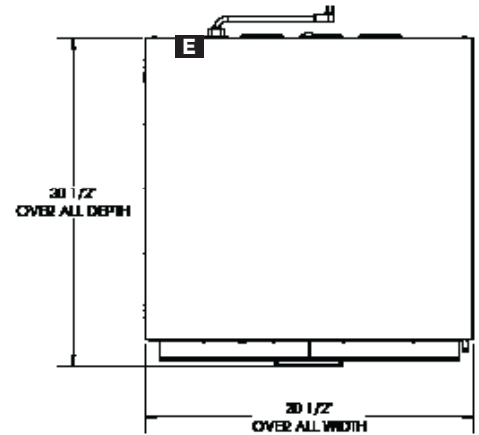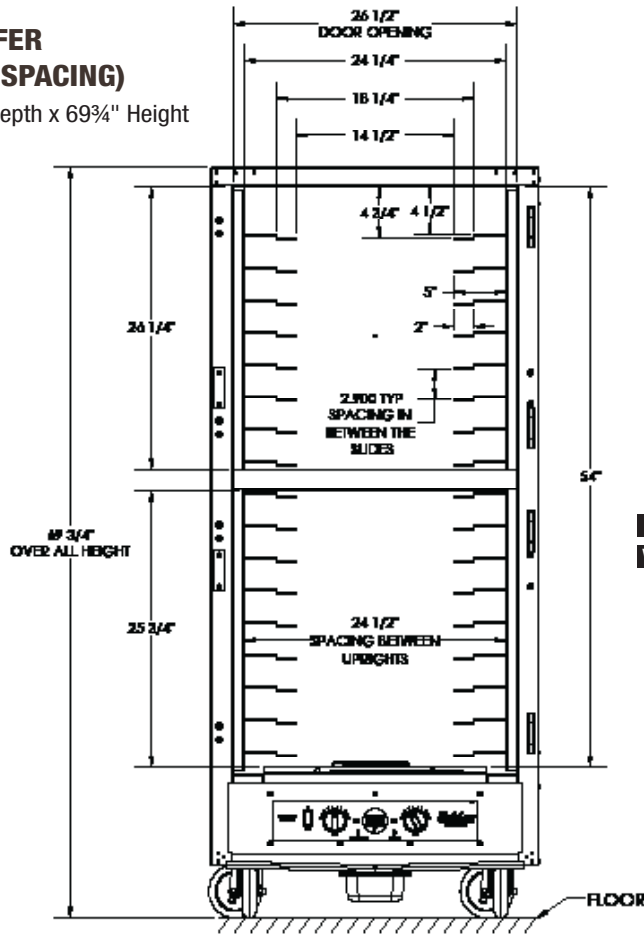

E ELECTRICITY CONNECTION

W WATER CONNECTION

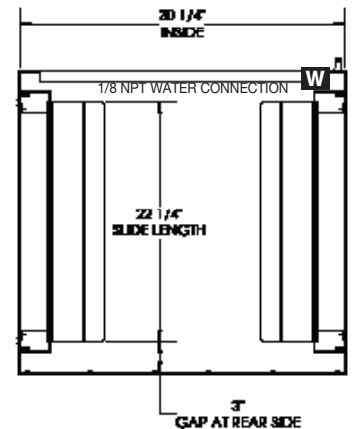

MODEL SELECTION

Model	Description	Supply Voltage	Amperage / Wattage
CP-1	Cabinet Proofer 120 V	120 V, 60 Hz, 1 ph	12 A, 1440 W
CP-2	Cabinet Proofer 220 V	220 V, 60 Hz, 1 ph	5.5 A, 1210 W
CP-2	Cabinet Proofer 240 V	240 V, 60 Hz, 1 ph	6.0 A, 1440 W
CP-1001	Auto Water accessory 120 V	120 V, 60 Hz, 1 ph	
CP-1002	Auto Water accessory 200-240 V	240 V, 60 Hz, 1 ph	

NET DIMENSIONS AND SHIPPING DATA

Data is estimated, for North America shipments

Model	Dimensions	Weight	Class
NET	31" W x 31" D x 70" H		
SHIPPED	36" W x 50" D x 84" H	330 lbs	150

ELECTRICAL CONNECTORS (SUPPLIED)



NEMA 5-15P (120 V)



NEMA 5-15P (220 V and 240 V)