



1 Tools needed to setup the Belshaw CP1 or CP2 proofer.

a. Box cutter.



2 Check packaging for damage before opening.

a. If damage is found contact shipping company.

b. If no damage is found continue.



3 Move proofer into location



4 Cut and remove the shrink wrap



5 Cut and remove top and corner packaging



6 Remove top and corner packaging



7 Open the rear of the packaging



8 Roll the proofer off the pallet



9 Place into final location



10 Lock the front two casters




11 Remove the plastic cover



12 Open doors and remove boxes



13 Place drip pan under proofer

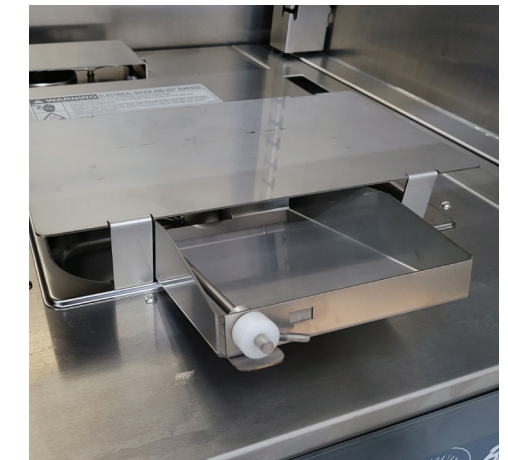

14 Place water fill tray with level indicator in water pan



15 Open box with support slides



16 Install 1st slide in the 3rd slot



17 1st support slide installed



18 Install the 2nd slide, skip 1 slot



19 Skip 2 slots at center door bar



20 Install 16 support slides total



21 Install 16 support slides on the left side




22 Remove plastic from the doors



23 Check the data tag on the back of the proofer, verify voltage before using



24 Plug proofer into outlet

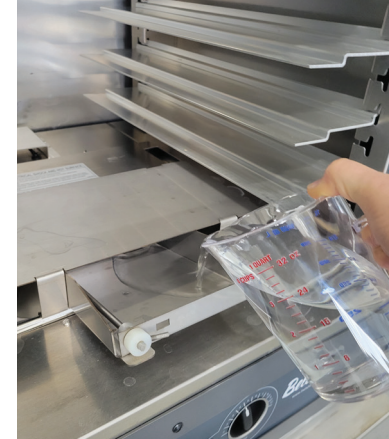

25 Add water to water box



26 Add water until the full indicator is level



27 Turn the proofer power switch to the ON position



28 The temperature and moisture indicator lights will turn on



29 Adjust the temperature dial at 2.5 to 3 for 95° - 100°F




30 Adjust the moisture dial at 4 to 5 for 60% - 70% humidity



31 Allow 30 minutes to get warm



32 Indicator lights will turn off once the temperature and humidity are reached

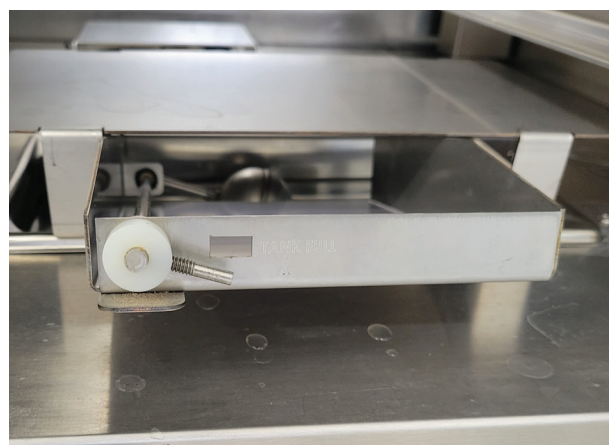


33 Add water as necessary, at least once per hour



34 Turn the proofer power switch to the OFF position when finished



35 Empty the drip pan when finished

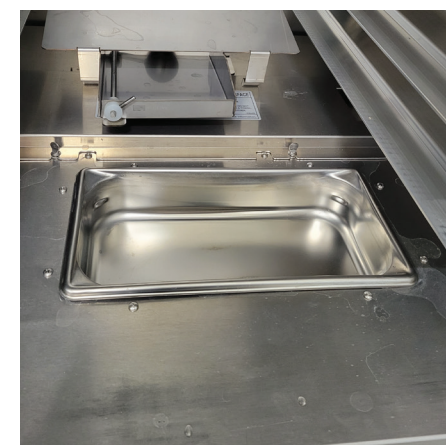

36 Empty and clean the water pan



See operator's manual for further information