




**10 standard  
donuts across**

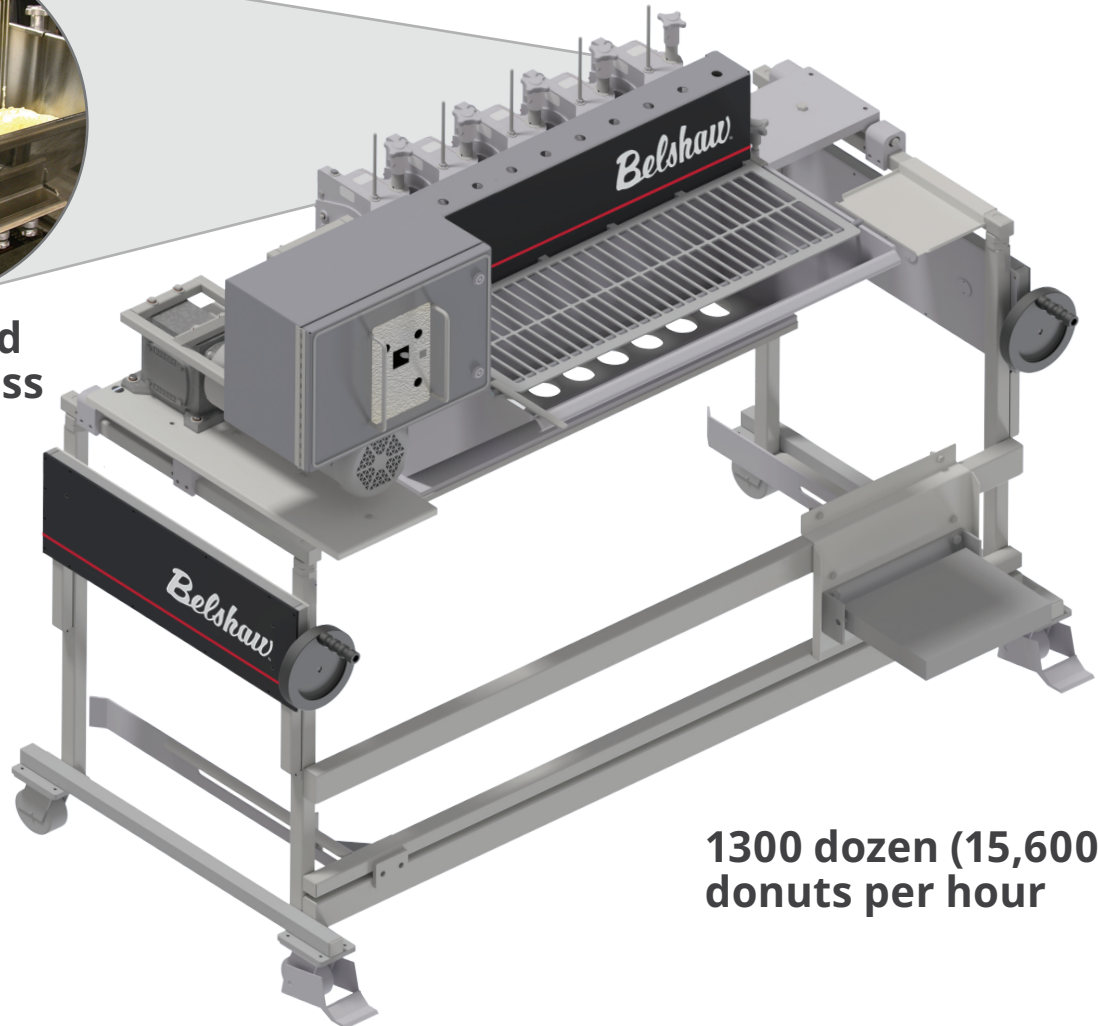

**1300 dozen (15,600)  
donuts per hour**



### APEX CAKE DONUT DEPOSITOR

**Apex Cake Donut Depositor** sets the gold standard for high-volume cake donut production. Engineered for performance and durability, it delivers consistent, reliable performance even in the most demanding commercial production environments.

Designed to pair seamlessly with Belshaw's extensive range of precision donut plungers, this versatile depositor empowers bakers to produce a wide variety of cake donut styles and sizes with unmatched consistency. From classic traditional rings to mini donuts, this depositor adapts to your needs with ease.

Its robust, industrial-grade construction ensures long-term dependability, while smooth, repeatable depositing guarantees uniform results batch after batch.

Whether you are scaling up production or refining your existing output, the Apex Cake Depositor is the trusted solution for quality, efficiency, and donut perfection.

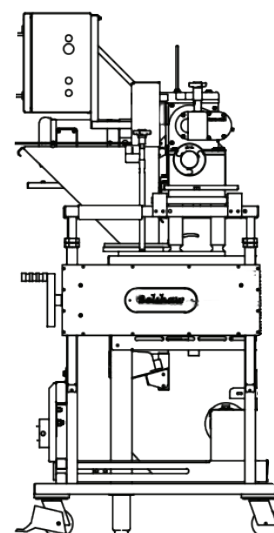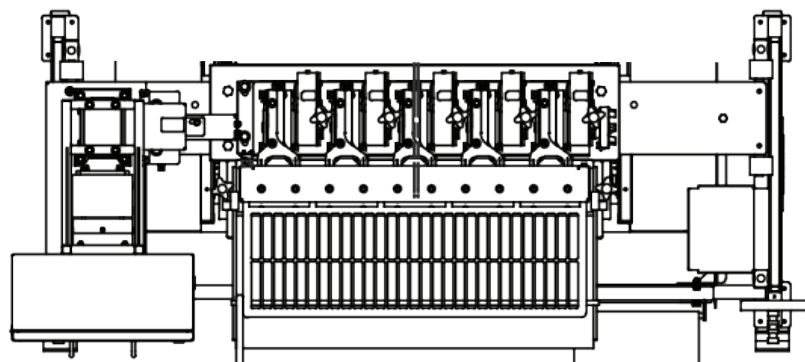

### Features


- For large, medium, small or mini donuts
- Deposit cycles are synchronized with the fryer
- Roto-Flex system allows weight adjustments while machine is running
- Fast, no tool required clean up
- Mountable on mobile lift carrier for height adjustment with step for easy hopper access
- Electronic deposit counter standard
- Will stop machine after pre-selected number of cuts is completed
- Total number of cuts counted
- Safety cover with magnetic switch
- No external power required
- Safety guard for cutter heads
- Hopper easily removable for cleaning

### Certification

- UL 508A and BEAG Listed

### MDDRF Depositors

Donut Size	Plunger Size
LARGE	2" — 2¼"
MEDIUM	1⅝" — 1⅞"
SMALL	1¼" — 1½"
MINI	⅞" — 1⅛"

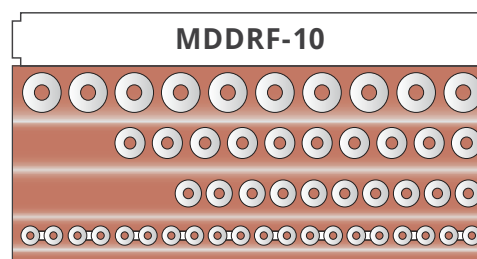

**FRYER USAGE – Compatible with C18-42 Fryers**

### Dimensions, Weight and Electrical Specs

MODEL	DIMENSIONS (WITH MOBILE CARRIER)			HOPPER CAPACITY	APPROX SHIPPING WEIGHT	POWER REQUIREMENTS	
	WIDTH	HEIGHT	DEPTH			208/240V 50/60Hz 3ph	440/480V 50/60Hz 3ph
MDDRF-10	88" (2.2 m)	74" (1.9 m)	39" (1.0 m)	245 lbs (111 kg)	2020 lbs (916 kg)	4.14 / 4.6 A	2.07 / 2.26 A